


DATASHEET

AQUAdisp™

Subsea display

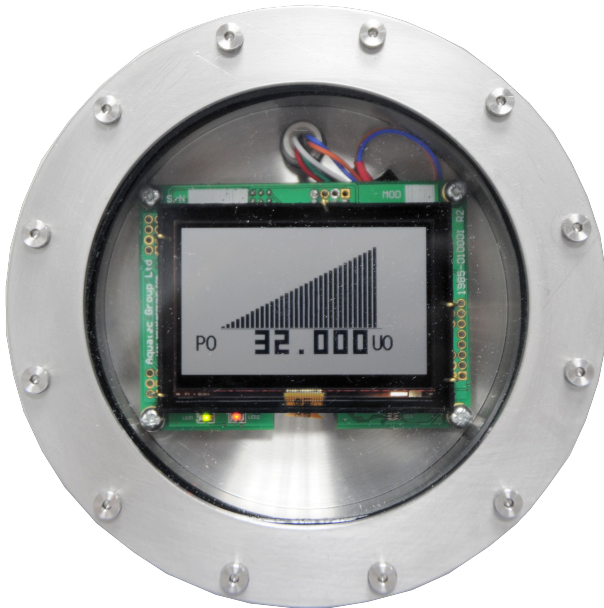

KEY FEATURES



- Displays up to 16 parameters over 4 screens and up to 16 graphs
- Low power - no need to switch on and off
- Rated to 4000m
- Available for purchase and rental

COMPATIBLE WITH...

- HYDROlog 2000, AQUAlogger 540/210 (standard model)
- Instruments with NMEA output (NMEA models)
- Instruments with serial output (custom models)

REVOLUTIONARY DISPLAY...

Designed for you

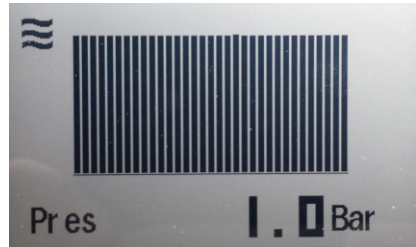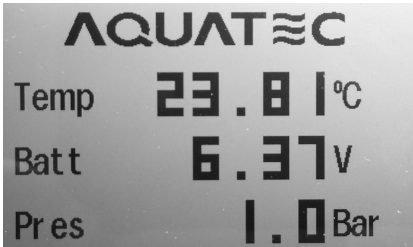

- Up to 16 parameters displayed over 4 screens
- Up to 16 graphs displayed, one per screen
- Graph displays last 33 values
- Connector at rear or on the side, depending on mounting arrangements
- Mounting points provided
- Highly configurable display set up
- Available for purchase or rental

TECHNICAL SPECIFICATION

Input	RS232
Power	4.2 to 30 VDC
Battery	External batteries available on request
Software	AQUAtalk for Windows for configuration
Connector	MCBH6M
Maximum depth	4000 m
Dimensions	135 mm diameter, 50 mm depth (excluding connector)
Weight	2.75 kg in air
Compatible with	HYDROlog 2000, AQUAlogger 540/210 NMEA/serial output instruments

Contact us

✆ +44 (0)1256 416010 (UK) ✆ 1-281-220-6035 (USA)
✉ inquiry@aquatecgroup.com www.aquatecgroup.com

AQUADisp™ is a trademark of Aquatec Group Limited. All trademarks & registered trademarks are acknowledged. Aquatec reserves the right to make changes to the specifications contained in this document without notice in the interests of maintaining or improving product quality. Document copyright © 2015 Aquatec Group. AQDD-Jan16v2.